

**KRM Corporation** An ISO 9001:2008 Certified company **LOTO & Safety Products** CE Certified

Lockout & Tagout    Barrier System    Signs & Posters    Tapes    Road Safety Parking    Security    PPE    Doorseals & Windowseals

lockout@krmcorporation.com, wadhwarajinder@gmail.com, krm.corp@yahoo.com, info@krmcorporation.com  
 www.krmcorporation.com, www.lockout.in  
 www.lockouttagouts.com, www.safetyloto.com

Contact No.: 0091 0129-4021 38  
 00 91 9810 291 381, 00 91 8800 544 88


**CE** Certified-KRM **LOTO** - Lockout Tagout + Labels & Signs + Acoustic Seals + **Safety Products**

# KRM LOTO Safety Padlocks

KRM Produce Complete Range of **lockout tagout** System + **Safety Products**

**Quality –Service-Commitment & Customer Satisfaction** is KRM Motto

Providing - **ATSS (AUDIT-TRAINING-SURVEY-SERVICES)**

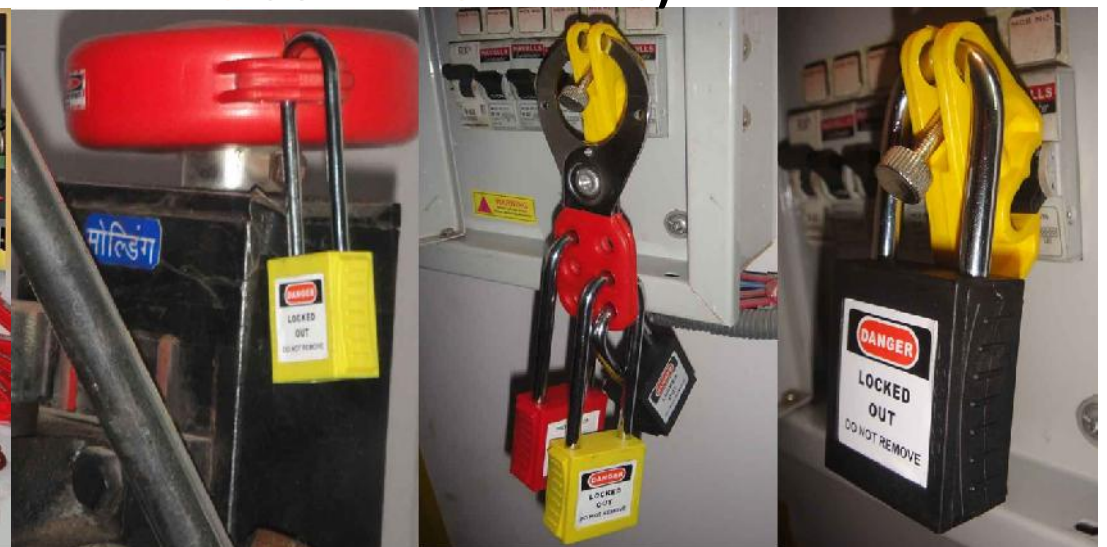

**KRM Corporation** An ISO 9001:2008 Certified company **LOTO & Safety Products** CE Certified

Lockout & Tagout    Barrier System    Signs & Posters    Tapes    Road Safety Parking    Security    PPE    Doorseals & Windowseals

lockout@krmcorporation.com, wadhwarajinder@gmail.com, krm.corp@yahoo.com, info@krmcorporation.com  
 www.krmcorporation.com, www.lockout.in  
 www.lockouttagouts.com, www.safetyloto.com

Contact No.: 0091 0129-4021 381  
 00 91 9810 291 381, 00 91 8800 544 881

## KRM-K-LSPL - PADLOCK WITH STEEL FINISH SHACKLE

KRM LOTO SAFETY PADLOCK----"seamless" lock structure durability--Key system: DIFFER KEY , ALIKE KEY Master & differ KEY

- \*The new management key technology,- 6 level management
- \*High Quality with waterproof, anti-corrosion and strong adhesive.
- \*Side of the antiskid design, can wear gloves.
- \*Key retaining-ensures that padlock is not left unlocked
- \*Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management. -----Key system: DIFFER KEY , ALIKE KEY Master & differ KEY
- \*Body material : Glass fiber reinforced nylon/ ( composition of ABS + NYLON )
- \*Shackle Material : Heavy coated carbide steel
- \*Color : Red, Yellow, Blue, Green, Orange, White, Brown, Black, Purple
- \*Work temperature : 0° - 250° F (-20° – 120° C)
- \*Body size : 45mm(H) X 40mm (W) X 20 mm (D)
- \*Shackle Size : 38mm
- \*Shackle dia : 6mm

KRM LOTO Safety Padlock



lockout@krmcorporation.com    www.lockouttagout.com  
 krm@krmcorporation.com    www.lockout.in


DIMENSIONS					
BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
45mm	40mm	20mm	38mm	20mm	6mm



ALIKE KEY  
KRM-K-LSPL-KA



DIFFER KEY  
KRM-K-LSPL-DK

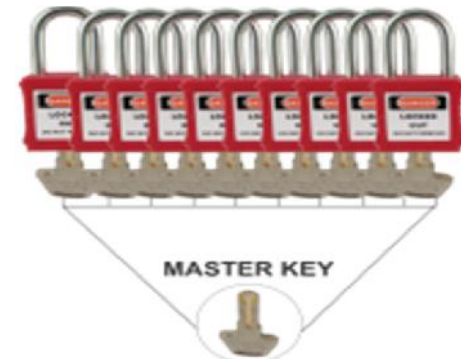

MASTER KEY  
KRM-K-LSPL-DK + M

**KRM Corporation** An ISO 9001:2008 Certified company **LOTO & Safety Products** CE Certified

Lockout & Tagout    Barrier System    Signs & Posters    Tapes    Road Safety Parking    Security    PPE    Doorseals & Windowseals

lockout@krmcorporation.com, wadhwarajinder@gmail.com, krm.corp@yahoo.com, info@krmcorporation.com  
 www.krmcorporation.com, www.lockout.in  
 www.lockouttagouts.com, www.safetyloto.com

Contact No.: 0091 0129-4021 381  
 00 91 9810 291 381, 00 91 8800 544 881

## KRM-K-LSPL-DE - PADLOCK WITH NYLON SHACKLE - DE-ELECTRIC

KRM LOTO SAFETY PADLOCK WITH NYLON SHACKLE--  
 --"seamless" lock structure durability--Key system:  
 DIFFER KEY , ALIKE KEY Master & differ KEY

- \*The new management key technology,- 6 level management
- \*High Quality with waterproof, anti-corrosion and strong adhesive.
- \*Side of the antiskid design, can wear gloves.
- \*Key retaining-ensures that padlock is not left unlocked
- \*Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management. -----Key system: DIFFER KEY , ALIKE KEY Master & differ KEY
- \*Body material : Glass fiber reinforced nylon/ ( composition of ABS + NYLON )
- \*Shackle Material : Heavy coated carbide steel
- \*Color : Red, Yellow, Blue, Green, Orange, White, Brown, Black, Purple
- \*Work temperature : 0° - 250° F (-20° - 120° C)
- \*Body size : 45mm(H) X 40mm (W) X 20 mm (D)
- \*Shackle Size : 38mm
- \*Shackle dia : 6mm



**KRM-K-LSPL-DE**

KRM LOTO Safety Padlock




lockout@krmcorporation.com    www.lockouttagout.com  
 krm@krmcorporation.com    www.lockout.in

DIMENSIONS					
BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH(C)	SHACKLE DEPTH (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
45mm	40mm	20mm	38mm	20mm	6mm



ALIKE KEY

**KRM-K-LSPL-DE-KA**

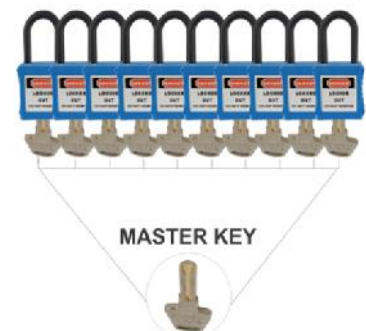

MASTER KEY

**KRM-K-LSPL-DE-DK+M**

**KRM Corporation** An ISO 9001:2008 Certified company **LOTO & Safety Products** CE Certified

Lockout & Tagout    Barrier System    Signs & Posters    Tapes    Road Safety Parking    Security    PPE    Doorseals & Windowseals

lockout@krmcorporation.com, wadhwarajinder@gmail.com, krm.corp@yahoo.com, info@krmcorporation.com  
 www.krmcorporation.com, www.lockout.in  
 www.lockouttagouts.com, www.safetyloto.com

Contact No.: 0091 0129-4021 381  
 00 91 9810 291 381, 00 91 8800 544 881

## KRM-K-LSPL-76mm

KRM LOTO SAFETY PADLOCK WITH SHACKLE HEIGHT 76MM ----"seamless" lock structure durability--Key system: DIFFER KEY , ALIKE KEY Master & differ KEY

- \*The new management key technology,- 6 level management
- \*High Quality with waterproof, anti-corrosion and strong adhesive.
- \*Side of the antiskid design, can wear gloves.
- \*Key retaining-ensures that padlock is not left unlocked
- \*Configuration key card, easy to know personal ID, indicating the corresponding padlock for easy management. -----Key system: DIFFER KEY , ALIKE KEY Master & differ KEY
- \*Body material : Glass fiber reinforced nylon/ ( composition of ABS + NYLON )
- \*Shackle Material : Heavy coated carbide steel
- \*Color : Red, Yellow, Blue, Green, Orange, White, Brown, Black, Purple
- \*Work temperature : 0° - 250° F (-20° – 120° C)
- \*Body size : 45mm(H) X 40mm (W) X 20 mm (D)
- \*Shackle Size : 38mm
- \*Shackle dia : 6mm

### KRM LOTO Safety Padlocks



lockout@krmcorporation.com    www.lockouttagout.com  
 krm@krmcorporation.com    www.lockout.in

DIMENSIONS					
BODY HEIGHT (A)	BODY WIDTH (B)	BODY DEPTH (C)	SHACKLE HEIGHT (D)	SHACKLE WIDTH (E)	SHACKLE THICKNESS (F)
45mm	40mm	20mm	76mm	20mm	6mm